

Shibaura Fire Pump Co., Ltd.

1-3-10 Minamihara, Matsumoto,
Nagano, 390-0846, Japan
PHONE.+81-263-29-1070 FAX.+81-263-29-1073
<https://www.shibaura-bousai.co.jp/english/>



PORTABLE FIRE-FIGHTING PUMP GENERAL CATALOG

⚠ Important Information


※Improper use of any product may cause serious or fatal injury. Read carefully the operating and safety instructions in your owner's manual before use.

※We reserve the right to discontinue models or change specifications without notice.

Shibaura Fire Pump Co., Ltd.



Shibaura Quality with Experience and Reliability

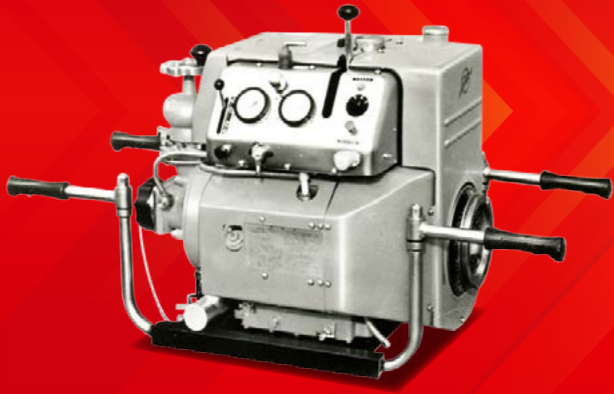

Ever since its launch of first Fire Pump in 1950, Shibaura has been providing reliable and high-performance products that meet our customers' needs.

As a pioneer of the portable fire fighting pumps, the company has become one of the most respected names in the rescue, fire prevention and disaster relief sectors.

The complete line of Portable fire fighting pumps and other products are sold through our sales network.

History

- 1942 Matsumoto Factory of Ishikawajima Shibaura Turbine Co., Ltd., established as a joint venture between Ishikawajima Shipyard (now IHI Corporation) and Shibaura Engineering Works Co., Ltd. (now Toshiba Corporation).
- 1950 Ishikawajima-Shibaura Machinery Co., Ltd. established with change of business into Internal combustion engines, Garden tractors, and the first Fire-fighting pump launched.
- 1971 Air-cooled two-stroke engine fire-fighting pump TF series launched.
- 1987 Stationary pump, SDG series, launched.
- 1992 Water-cooled two-stroke engine fire-fighting pump SF series launched.
- 1996 Water purification system launched.
- 2007 Ishikawajima-Shibaura Machinery Co., Ltd. Changes its name to IHI Shibaura Machinery Corporation.
- 2012 Transfer agreement of fire-fighting pump business of "Rabbit" with Makita Numazu Corporation concluded.
Water-cooled four-stroke engine fire-fighting pump launched.
- 2016 Corporate brand unified into "SHIBAURA"
- 2017 Shibaura Fire Pump Co., Ltd. established separating from IHI Shibaura Machinery Corporation.



Contents

- 01 About us / History
- 03 Shibaura Technology and Engineering
- 04 Options

05 **Air Cooled FT500-A**

Discharge Performance (1m suction head):
0.5MPa : 1,450L/min
1.0MPa : 830L/min

Priming Performance (1m suction head): 3.5 sec

06 **Air Cooled FT300-AB / FT400-AB**

Discharge Performance (1m suction head):
0.5MPa : 568L/min / 568L/min
0.8MPa : 318L/min / 330L/min

Priming Performance (1m suction head): 3.5 sec

07 **Air Cooled TF516MH-AB**

Discharge Performance (1m suction head):
0.5MPa : 560L/min
0.8MPa : 280L/min

Priming Performance (1m suction head): 3.6 sec

08 **Water Cooled P572S-A**

Discharge Performance (1m suction head):
0.5MPa : 1,650L/min
1.0MPa : 1,100L/min

Priming Performance (1m suction head): 2.1 sec

09 **Water Cooled FK500-A**

Discharge Performance (1m suction head):
0.5MPa : 1,595L/min
1.0MPa : 1,020L/min

Priming Performance (1m suction head): 2.2 sec

10 **Water Cooled FF500AR-A**

Discharge Performance (1m suction head):
0.5MPa : 1,550L/min
1.0MPa : 980L/min

Priming Performance (1m suction head): 2.2 sec

11 **Specifications** FT500-A FT300-AB / FT400-AB TF516MH-AB
P572S-A FK500-A FF500AR-A

13 **SDG Series** **SMALL** SDG650A
MEDIUM SDG1000A SDG1500A SDG2000A SDG2500A SDG3000A
LARGE SDG4000B SDG5000B SDG6000B SDG7000B

14 **SMG Series** SMG13AB SMG13EB SMG13HB



Shibaura Technology and Engineering

Shibaura Original 2 Stroke Gasoline Engine

Small, light weight and high-power engine that is specifically developed for fire-fighting pump. This high-speed 2 stroke gasoline engine can take full advantage of pump performance and endure over a long period of operation.



Shibaura Original Centrifugal Pump

Shibaura portable fire pump design consists of original engine and centrifugal single stage pump in one-piece. It makes the pump compact and enhances the efficiency of its performance. Realizing the large amount and long distant discharge that stands out in industry.



Shibaura Original Vacuum Pump

Priming water is not necessary to be filled into the suction line. Shibaura's specifically designed, light-weight, and compact vacuum pump removes the air inside the suction line instantly and achieves the short time discharge performance.



Alert Monitoring System

Alert monitoring system indicates a trouble with warning lamp when malfunction (low oil and so forth) should happen. Engine automatically shuts down to protect itself in emergency situations.



Quick Discharge Valve

Lever-type discharge valve enables quick and accurate discharge operation. The discharge valve is also swivel 180 degrees to increase the capability of extinguishing fire.



Impeller

Shibaura's originally designed impeller plays important role to deliver a large amount of water in long distance. Special surface treatment is processed to prevent corrosion.



Options

LED Lamp and Lamp Stand

Easy direct plug-in connection to fire fighting pump provides safe and secure operation in the night-time.



LED Lamp 24W
340 x 114 x 45 (mm)



LED Lamp 48W
341 x 107 x 62 (mm)
Attachable to FF500AR-A only



Lamp Stand
826 x 106 x 106 (mm)

Wye Ball Valve

The 1 into 2 wye ball valve is available for all models.
255 x 322 x 170 (mm)



Dual-Inlet Portable Ground Monitor

Flow rate up to 1,900LPM with dual swivel inlet. Elevation adjustable between 20° and 60° unattended.
Inlet & outlet diameters: 65mm
Dry weight: 16kg
Couplers: Various available, e.g. BSP, GOST, and Machino.



Direct Valve SRV2000-75 / SRV2000-65

In case fire-fighting vehicle cannot reach a particular place, Shibaura Direct Valve gives you a great advantage in fire fighting relay operation without operators.



Features

- Simplify relay water supply operation.
- Protect operators, hoses and pumps from excessive pressure rise.
- It is small and lightweight, convenient to carry, and can be set without tools.

Video




Demonstration Video. See for yourself.

Specifications

Suction Port	SRV2000-75 75mm	SRV2000-65 65mm
Parts Number	295270104	295270152
Discharge Port	65mm	
Discharge Pressure	2MPa	
Discharge Volume 75B (MAX/STD)	2000 Liter/min	1700 Liter/min
Discharge Volume 65B (MAX/STD)	2000 Liter/min	1500 Liter/min
Dimension	L235xW194xH180mm	
Weight	4.0kg	

Example



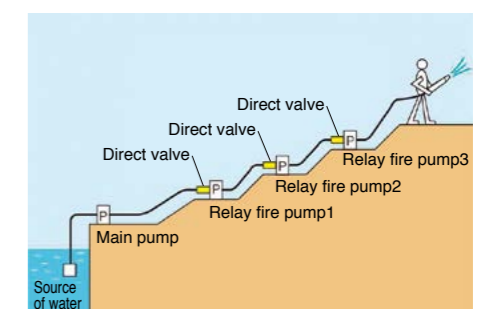


Strong power with the Shibaura's original air-cooled engine

Biggest Shibaura's air-cooled engine provides strong power without having any influence of water quality.



FT500-A

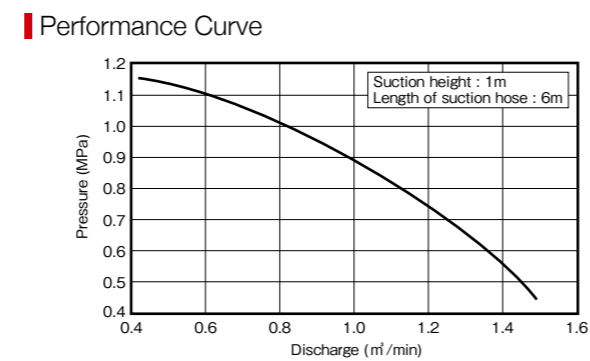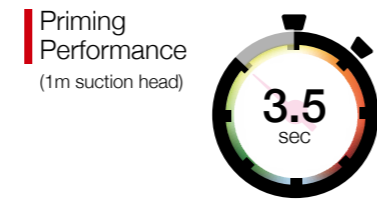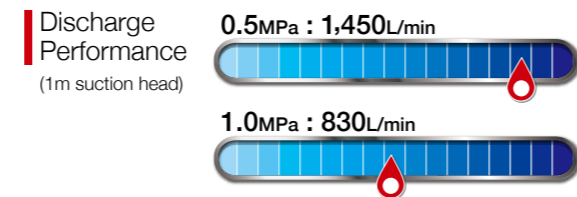




- 2-stroke gasoline engine
- Air cooled
- Carburetor system

Compact and light weight pump with the highest performance in the class

Newly installed 5.3L fuel tank provides longer operation.




FT300-AB FT400-AB

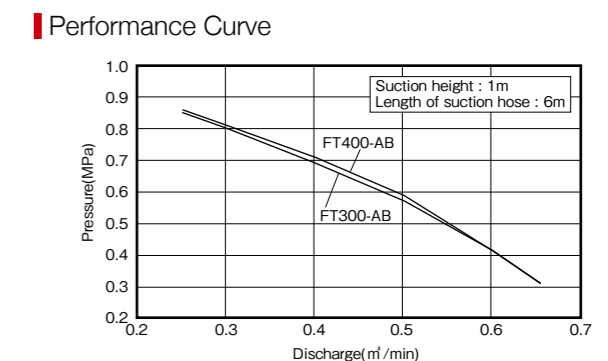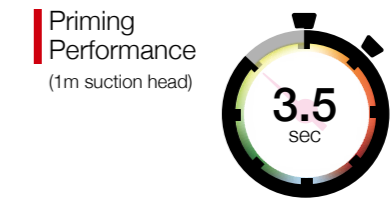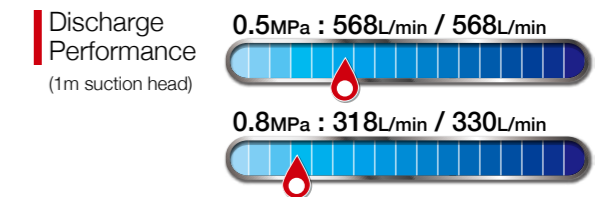

- 2-stroke gasoline engine
- Air cooled
- Carburetor system


Dimensions

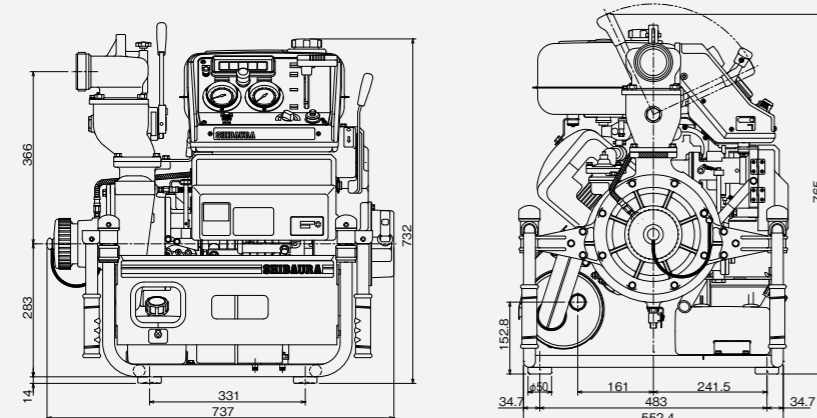

Video



Dimensions

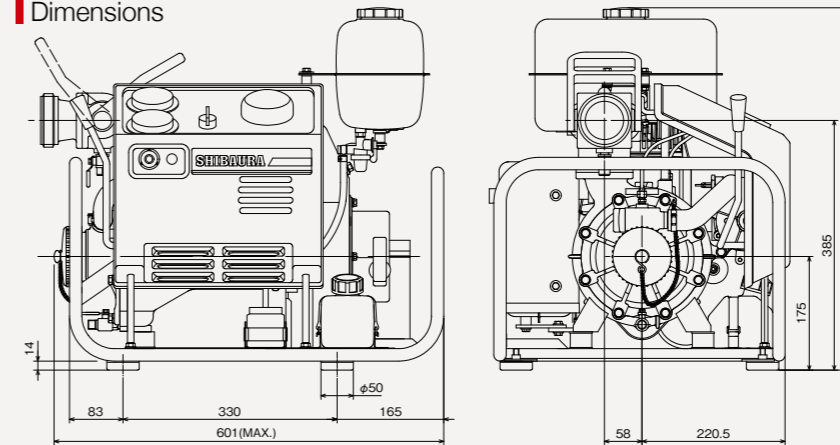

Video




Smallest pump and superior in mobility


Compact and light weight pump with Shibauro's original air-cooled engine. Simply designed and easily mountable on small vehicles.



TF516MH-AB

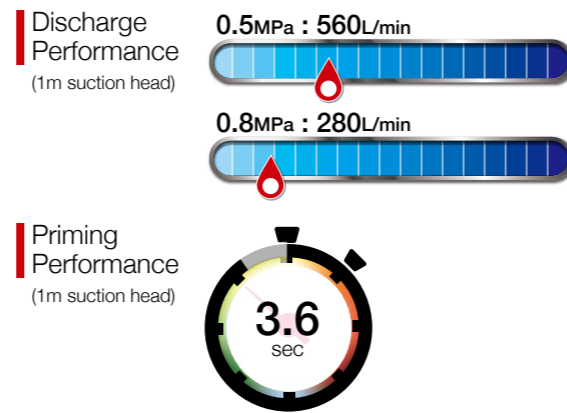

Performance Curve

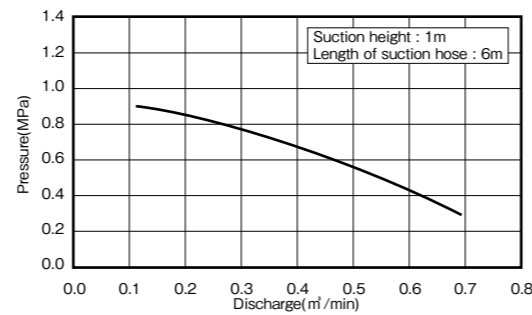

2-stroke gasoline engine




Air cooled



Carburetor system

Dimensions

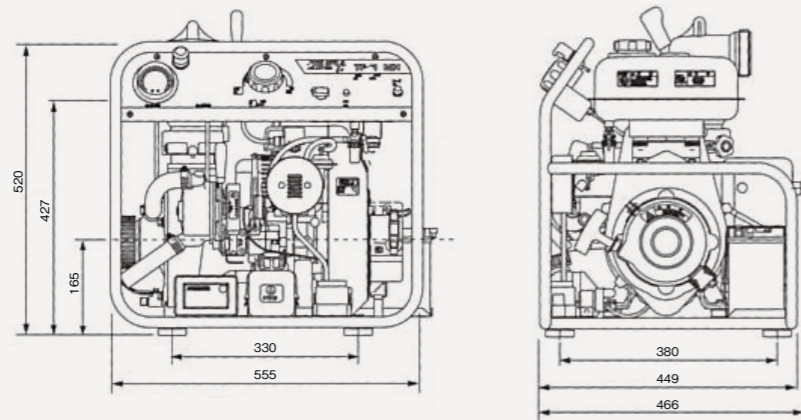


Highest discharge performance of our the lineup


A large oil-less vacuum pump and high power engine enable faster water suction and larger amount of discharge in the same class.



P572S-A

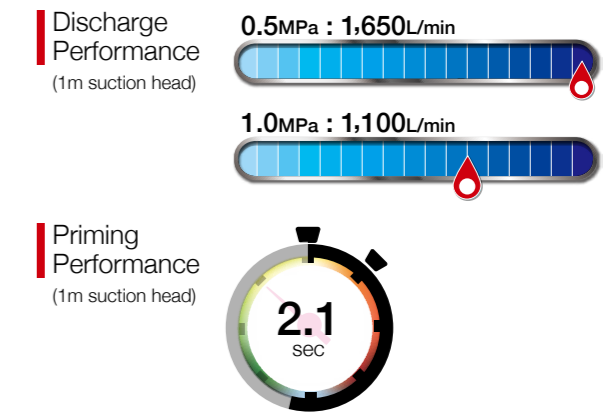

Performance Curve

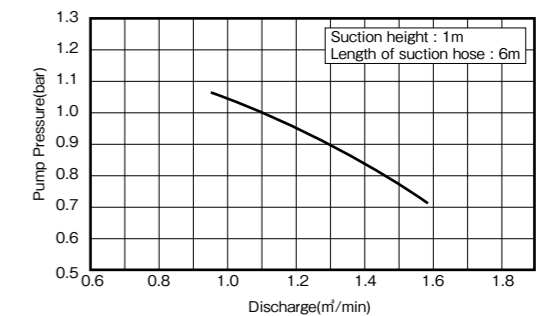

2-stroke gasoline engine




Water cooled



Carburetor system

Dimensions


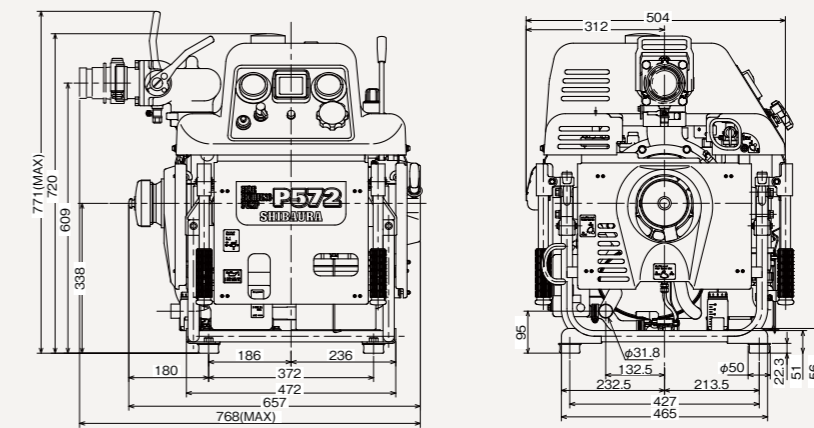


Well-balanced and durable pump with Shibaura's original engine-cooling system.


Fully Water Cooled Radiator gives longer life in the activities at dirty water area without overheating.



FK500-A

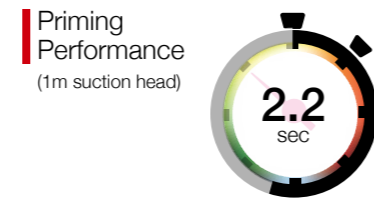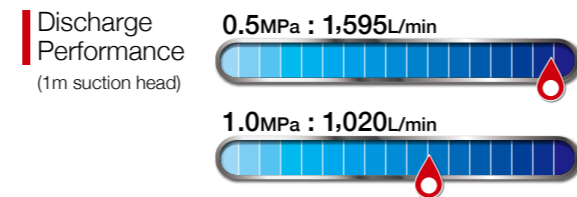

Performance Curve

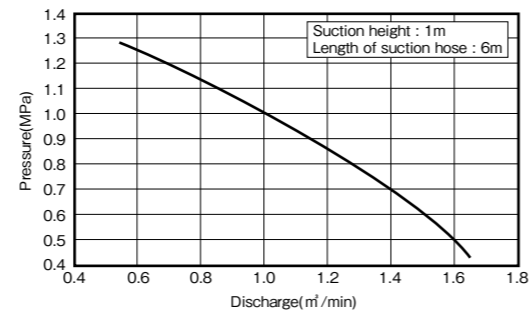

2-stroke gasoline engine





Water cooled



Carburetor system

Dimensions

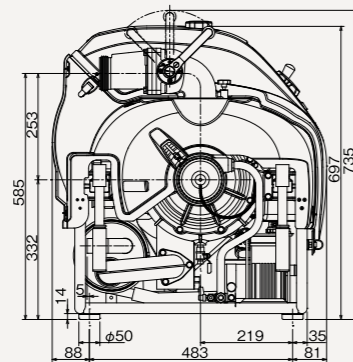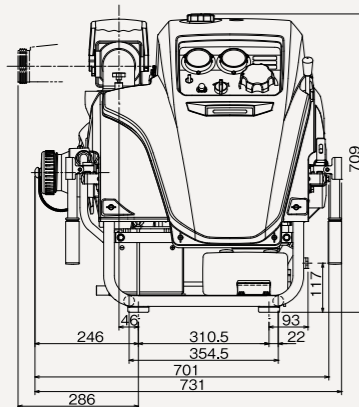

Video





Operation Video. See for yourself.

Auto Relay for long-distance water delivery


Auto Relay Pump extends delivering water from 1st pump to other pumps without operators. Electric fuel injection enables easy starting and appropriate fuel consumption.



FF500AR-A

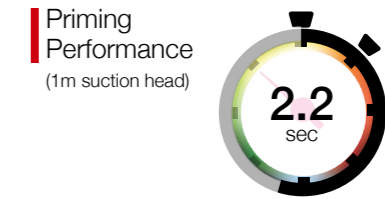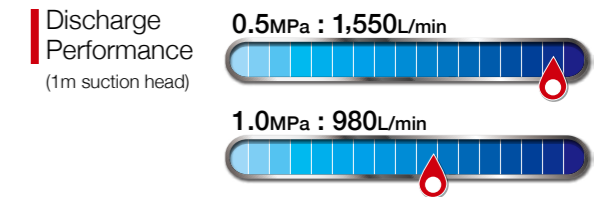

Performance Curve

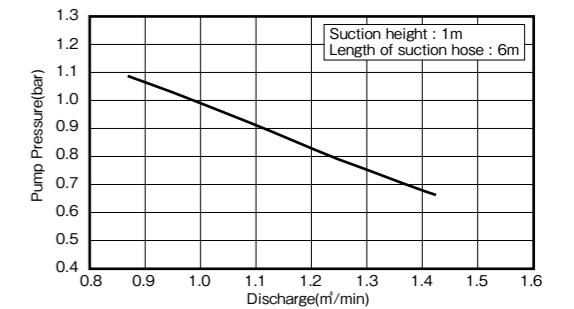

2-stroke gasoline engine





Water cooled






Fuel injection system

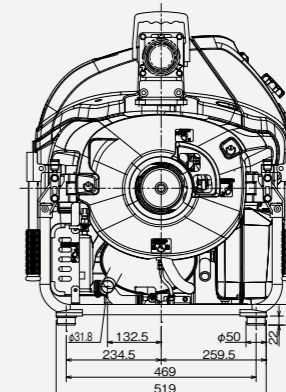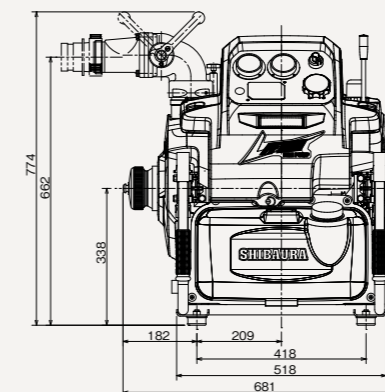Dimensions



AIR COOLED TYPE

MODEL				
Dimensions LxWxH (mm)	737x572x765	601x463x559	555x466x520	
Dry weight	90kg	45kg	41kg	
PUMP				
Model	SHIBAURA B612B	SHIBAURA C505		
Type	High pressure, single stage centrifugal pump			
Discharge performance	0.5MPa, 1m suction head	1450L/min	568L/min / 568L/min	560L/min
	0.5MPa, 3m suction head	1435L/min	550L/min / 556L/min	533L/min
	1.0MPa, 1m suction head	830L/min	318L/min (0.8MPa) / 330L/min (0.8MPa)	280L/min (0.8MPa)
	1.0MPa, 3m suction head	790L/min	300L/min (0.8MPa) / 309L/min (0.8MPa)	257L/min (0.8MPa)
Priming performance @ 1m suction head	3.5 Seconds		3.6 Seconds	
Discharge Diameter JIS	65 mm			
Suction Diameter JIS	75 mm	65 mm		
ENGINE				
Model	SHIBAURA E440C	SHIBAURA E200	SHIBAURA E180A	
Type	Air cooled 2-stroke gasoline engine			
Cooling system	Air cooled type			
No of cylinder	2 Cylinder	1 Cylinder		
Fuel system	Auto choke carburetor			
Displacement	436cc	200cc	182cc	
Bore x Stroke	68 mm x 60 mm	68 mm x 55 mm	65 mm x 55 mm	
Rated output	22.8kW / 31PS	8.8kW / 12PS	8.1kW / 11PS	
Starting	Electric starter & manual starter			
Fuel tank capacity	14.5L	5.3L	4.2L	
Fuel consumption	14L	5.4L	4.6L	
Fuel type	Regular unleaded gasoline			
VACUUM PUMP				
Type	OIL LESS VACUUM PUMP			
Blade type	4-Vane eccentric rotary type			
Blade type	High strength carbon			
Maximum suction height	9m			
FEATURES				
Shibuara Original 2 stroke Gasoline Engine	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Shibuara Original Centrifugal Pump	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Shibuara Original Vacuum Pump	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Alert Monitoring System	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Quick Discharge Valve	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

※The specification above are tentative and subject to change without notice.

WATER COOLED TYPE

MODEL				
Dimensions LxWxH (mm)	657x584x720	701x652x709	681x639x774	
Dry weight	94kg	85kg	98kg	
PUMP				
Model	SHIBAURA P572	SHIBAURA B716	SHIBAURA P556	
Type	Single stage, high pressure turbine pump			
Discharge performance	0.5MPa, 1m suction head	1650L/min	1595L/min	1550L/min
	0.5MPa, 3m suction head	1530L/min (0.7MPa)	1580L/min	1320L/min (0.7MPa)
	1.0MPa, 1m suction head	1100L/min	1020L/min	980L/min
	1.0MPa, 3m suction head	1070L/min	975L/min	960L/min
Priming performance @ 1m suction head	2.1 Seconds	2.2 Seconds	2.2 Seconds	
Discharge Diameter JIS	65 mm			
Suction Diameter JIS	75 mm			
ENGINE				
Model	SHIBAURA EP572	SHIBAURA L618Z	SHIBAURA EP556	
Type	Water cooled 2-stroke gasoline engine			
Cooling system	Water cooled type			
No of cylinder	2 Cylinder			
Fuel system	Auto choke carburetor		Electronic control fuel injection	
Displacement	723cc	618cc	635cc	
Bore	80 mm x 72 mm	75 mm x 70 mm	76 mm x 70 mm	
Rated output	34.3kW / 46PS	33.1kW / 45PS	32.0kW / 43PS	
Starting	Electric starter & manual starter			
Fuel tank capacity	12.0L	14.5L	11.0L	
Fuel consumption	17.5L	14.0L	1.07L	
Fuel type	Regular unleaded gasoline			
VACUUM PUMP				
Type	OIL LESS VACUUM PUMP			
Blade type	4-Vane eccentric rotary type			
Blade type	High strength carbon			
Maximum suction height	9m			
FEATURES				
Shibuara Original 2 stroke Gasoline Engine	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Shibuara Original Centrifugal Pump	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Shibuara Original Vacuum Pump	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Alert Monitoring System	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Quick Discharge Valve	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

※The specification above are tentative and subject to change without notice.

SMALL

SDG650A



MEDIUM

SDG1000A SDG2500A
SDG1500A SDG3000A
SDG2000A



LARGE

SDG4000B SDG6000B
SDG5000B SDG7000B



Total solutions for the industrial fire caused due to an abnormal high temperature. Shibaura provides fully automatic water discharge system powered by diesel engine to cool down storage tanks to prevent fires and explosions at LPG/LNG storage plants and other industrial facilities.

Specifications

Model	SDG 650A	SDG 1000A	SDG 1500A	SDG 2000A	SDG 2500A	SDG 3000A	SDG 4000B	SDG 5000B	SDG 6000B	SDG 7000B
Dimensions (LWH) (mm)	820 x 600 x 1250	1275 x 620 x 1050	1365 x 620 x 1050	1426 x 600 x 1140	1570 x 600 x 1140	1900 x 750 x 1275	2050 x 750 x 1275			
Dry weight (kg)	240	410	425	585	610	1180	1300			
Water discharge (L/min)	650	1000	1500	2000	2500	3000	4000	5000	6000	7000
Total pump head (m)	40									
Displacement (cc)	507	1131		2216		4400				
Maximum output (kW)	10.2	19.1		34.6		79.5				

Features

- ALL-IN-ONE PACKAGE
Engine, fuel tank, pump, vacuum pump and controller are included in SDG system for fast and easy installation.
- INTEGRATED COMPUTER SYSTEM
- SAFETY AUTO SHUTDOWN SYSTEM
- HIGH POWER DIESEL ENGINE




Fire hydrant system in Japanese Inn. Matsumoto-kan



Water cooling system for LPG tanks

Installation Example - LPG STORAGE FACILITY

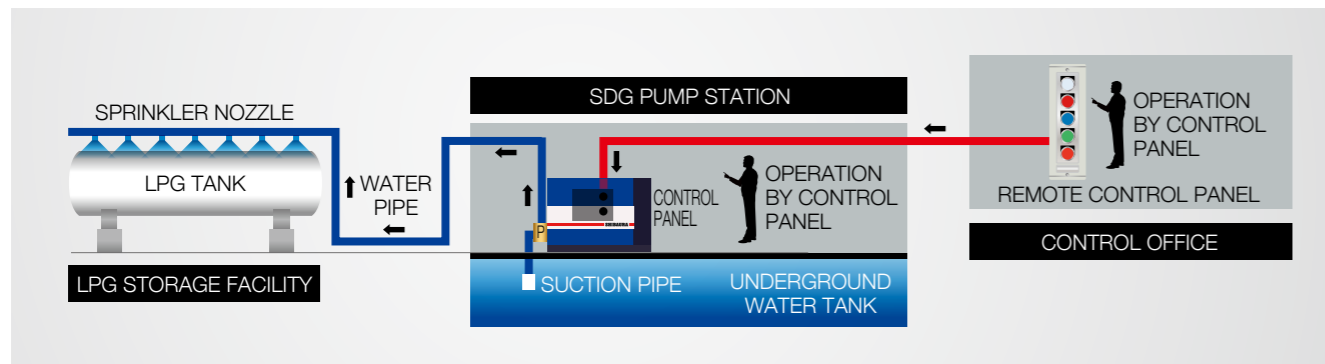

SMG13AB
2,000 L/h

Electric motor and Manual



SMG13EB
2,000 L/h

Engine and Manual



SMG13HB
1,000 L/h

Manual



In times of natural disaster;

- Drinking Water for drinking and cooking water is required 3 liters per a day per a person
- Daily Life Water for washing, cleaning and showering is required 30 liters per a day per a person

Shibaura's water purification system can provide clean and safe water taken from various water sources during the emergency situation.



Specifications

Model	SMG13AB	SMG13EB	SMG13HB
Maximum flow rate (L/h)	2000		1000
Dimensions (LWH) (mm)	793 x 537 x 650	793 x 537 x 650	544 x 472 x 1,070
Dry weight (kg)	48	51	25
Power source	AC100V	4 stroke gasoline engine	Manual

Features

DUAL FILTER

Hollow fiber membrane and charcoal filter can eliminate the color and small particles in the water, such as bacteria without use of chlorine-based sterilizer. Active charcoal filter eliminates color, odor and dissolved chlorine.

EASY CARE BY BACK WASHING SYSTEM

Easy filter cleaning by switching lever during the operation.

CORROSION RESISTANCE

Stainless steel frame and housing.



image (Source of water)

More Information



Suitable water sources and usage

Source	Drinking Water *Disinfectant, such as sodium hypochlorite, is required.	Daily Life Water
1. Swimming pool	Yes	Yes
2. Underground water tank	Yes	Yes
3. Lifted water tank	Yes	Yes
4. River, stream and pond (close to drinkable level)	Yes	Yes
5. River, stream and pond (not drinkable)	No	Yes
6. Sea water	No	No

* It is safer and better to use typical river water just for washing, cleaning and shower. It is because the river water has unstable water quality.
 ※ In the case 2., TAP WATER must be filled inside the underground water tank when it is utilized as "drinking water". If the water is not taken from the tap, it must be used only for "daily-life", not for "drinking".
 ※ The water in fireproof water tank (open-top) is the same condition as the case of 4. or 5..
 ※ If the water taken from underground water tank (case 2.) and its PH is at 8.6 or more, Carbon Dioxide Neutralization Devise (optional extra) is required.